


## Type 15–6 L

**Piston rod Ø:** 6 mm  
**Cylinder Ø:** 15 mm  
**Spring force:** 40–350N  
**Extension speed:** 0,1 m/s  
**Thread:** M6x1,0  
*End fittings are ordered separately, see pages 93–94*

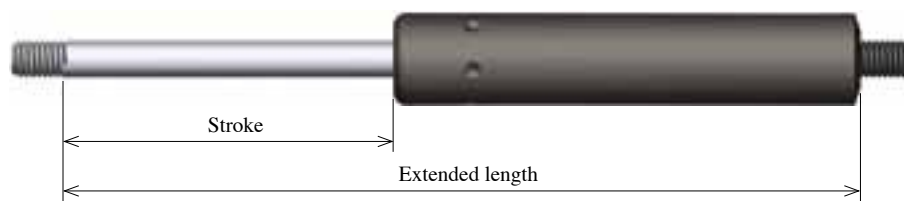

Part no.	Extended Length	Stroke	Force (N)	Weight (kg)	Part no.	Extended Length	Stroke	Force (N)	Weight (kg)
4461	127	50	40	0,056	4813	273	105	40	0,105
4462	127	50	80	0,056	4829	273	105	40	0,105
4463	127	50	120	0,056	4494	273	105	80	0,105
4464	127	50	160	0,056	4495	273	105	120	0,105
4465	127	50	200	0,056	4496	273	105	200	0,105
4466	127	50	240	0,056	4497	273	105	240	0,105
4468	127	50	280	0,056	4498	273	105	280	0,105
4469	127	50	350	0,056	4499	273	105	350	0,105
4470	156	60	40	0,068	4500	303	135	40	0,108
4471	156	60	80	0,068	4501	303	135	80	0,108
4472	156	60	120	0,068	4502	303	135	120	0,108
4473	156	60	160	0,068	4503	303	135	160	0,108
4474	156	60	200	0,068	4504	303	135	200	0,108
4475	156	60	240	0,068	4505	303	135	240	0,108
4476	156	60	280	0,068	4506	303	135	280	0,108
4477	156	60	350	0,068	4507	303	135	350	0,108
4478	181	70	40	0,074	8109	378	175	40	0,112
4479	181	70	80	0,074	8110	378	175	80	0,112
4480	181	70	120	0,074	8111	378	175	120	0,112
4549	181	70	160	0,074	8112	378	175	160	0,112
4482	181	70	200	0,074	8113	378	175	200	0,112
4483	181	70	240	0,074	8114	378	175	240	0,112
4484	181	70	280	0,074	8115	378	175	280	0,112
4485	181	70	350	0,074	8116	378	175	350	0,112
4486	221	90	40	0,085					
4487	221	90	80	0,085					
4488	221	90	120	0,085					
4489	221	90	160	0,085					
4490	221	90	200	0,085					
4481	221	90	240	0,085					
4537	221	90	280	0,085					
4492	221	90	350	0,085					
8101	236	105	40	0,102					
8102	236	105	80	0,102					
8103	236	105	120	0,102					
8104	236	105	160	0,102					
8105	236	105	200	0,102					
8106	236	105	240	0,102					
8107	236	105	280	0,102					
8108	236	105	350	0,102					