



THE **DRJ-SERIES** RAIL JACKS ARE IDEALLY SUITED TO ALIGNING, GAUGING AND LIFTING OF RAIL OR SLEEPERS.

Both models have forged aluminium housing, are robust, lightweight and designed to reduce the risk of operator injury. The bladder system inside the aluminium protected reservoir allows the jacks to be used in both the horizontal and vertical positions making them exceptionally versatile. They both have a spring return mechanism that allows a jack with no load to be returned to the retracted position and are fitted with an internal safety pressure relief valve to protect against overloading. Both models include an operating handle and the DRJ-15 features a quick release valve for fast retraction.

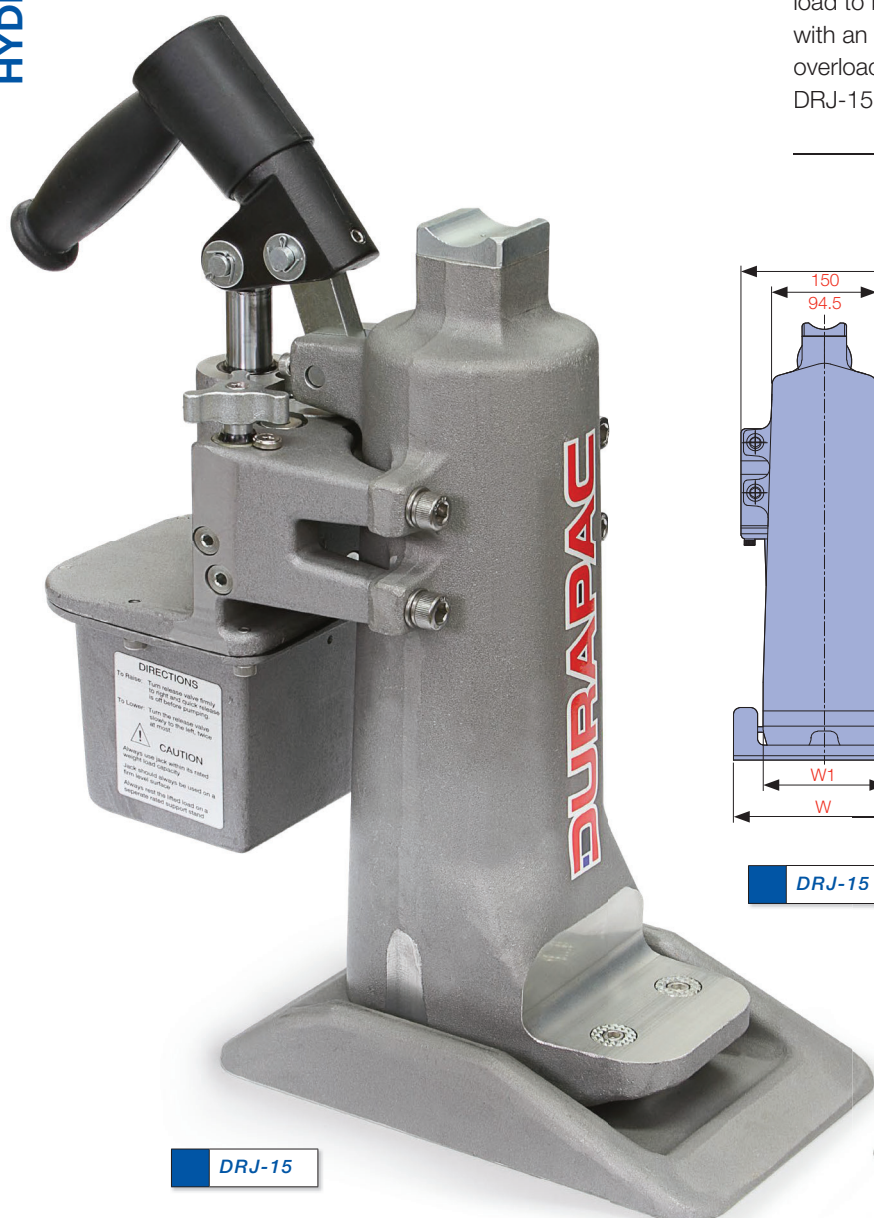

DRJ-15

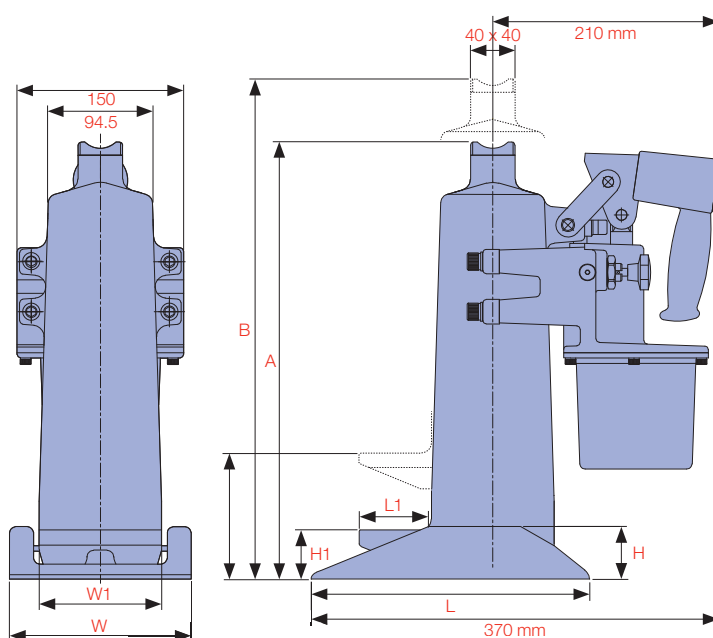

DRJ-15



QUICK RELEASE
for fast retraction speed

Model No.	Jack Capacity ton* / kN		A Collapsed Height (mm)	Stroke (mm)	B Extended Height (mm)	Travel/Pump Stroke (mm)	Max. Handle Effort (kg)	Base Dimensions W x L x H (mm)	Toe Dimensions W1 x L1 x H1 (mm)	Weight without Handle (kg)
DRJ-10	10	83.3	373	225	598	4.5	36	152 x 280 x 50	79 x 66 x 30	20.2
DRJ-15	15	150.0	400	220	620	4.1	44	163 x 250 x 47	100 x 64 x 45	20.1

* Nominal Jack Capacity in ton - see kN values for actual capacity

REMOVABLE EXTENSION HANDLE

80 cm / 93 cm

HANDLE EFFORT

maximum 36 kg / 44 kg
with extension handle

RELEASE VALVE

allows for controlled lowering
and is recessed for protection
against accidental knocks

INTERNAL OIL RESERVOIR BLADDER

allows operation in horizontal
or vertical position

OIL RESERVOIR COVER

manufactured from aluminium
(6061)

LARGE ALUMINIUM BASE

one piece forged aluminium (7075T)
provides great support in soft ballast

CARRYING HANDLE

fixed in-line padded handle

CHROME PLATED

steel piston rod resists
corrosion and extends life

INTERNAL SPRING RETURN

allows an unloaded jack to
return to the retracted position

INDEXED TOE

minimises swivel and allows
for a safe, stable platform

LOAD CAPACITY

10 ton / 15 ton*
of lifting force

MINIMUM BASE HEIGHT

50 mm / 47 mm for
easy positioning under
the base of the rail




CAPACITY RANGE

10 - 15 ton*
83.3 - 150 kN



STROKE RANGE

220 - 225 mm

Feature details showing
measurements are shown
DRJ-10 / DRJ-15

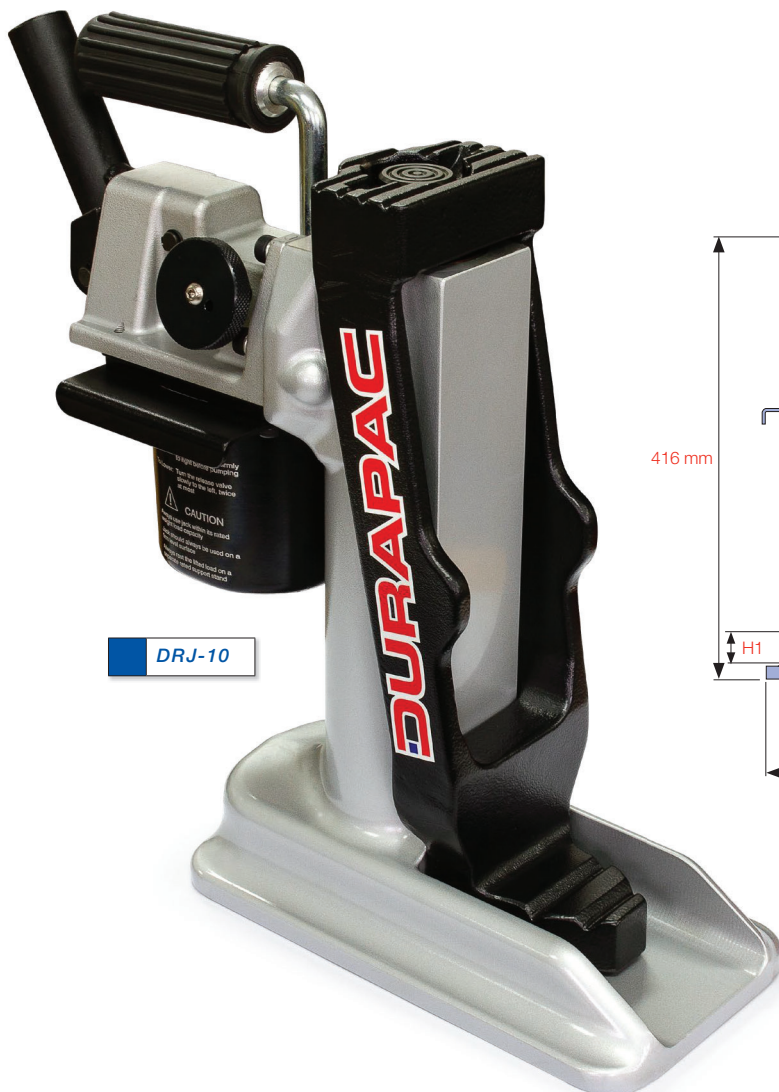

DRJ-10

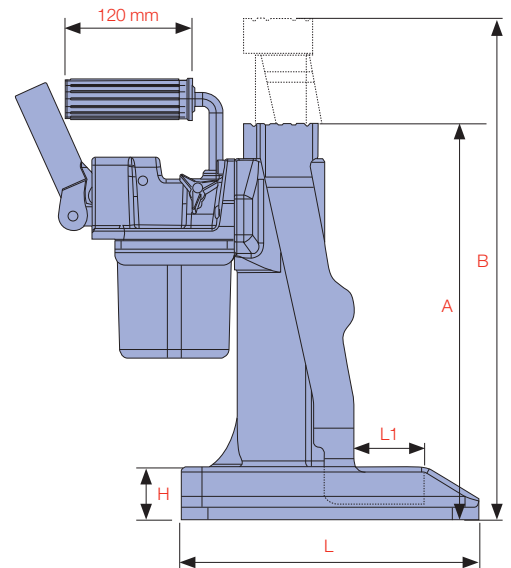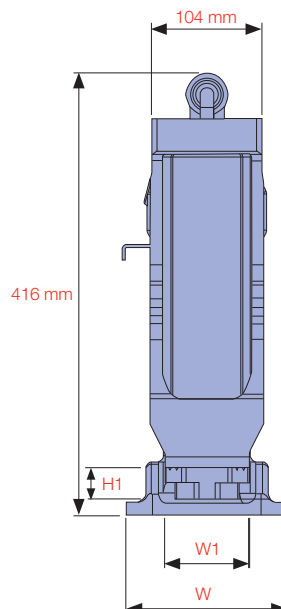

DRJ-10