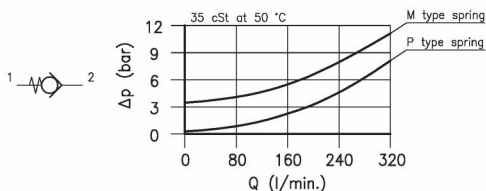
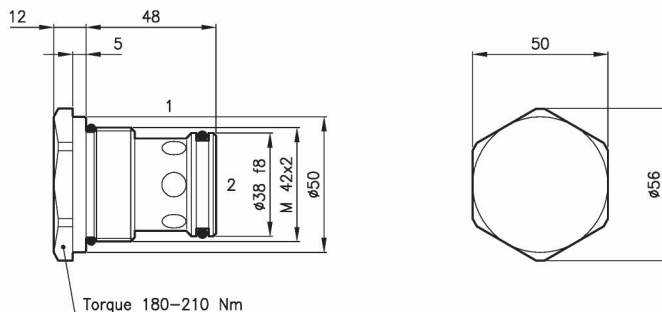


Technical features


Cavity	(For dimensions see catalogue 17.000)	S 70/2
Nominal flow	(l/min.)	300
Max. pressure	(bar)	420
Cracking pressure	(bar)	0.35–3.5
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.480
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

Ordering Informations
CAE 70/P
CAE 70 = Valve type


Standard springs

P = 0.35 bar

M = 3.5 bar

Codes:

CAE 70/P 72 011 100

CAE 70/M 72 011 101

External seals kit 90 620 109

 CAE 70 valves can be assembled
 on standard bodies 70–LO series;
 for dimensions see catalogue 16.010