

CETOP-03 SIZE LEVER-OPERATED DISTRIBUTOR




Characteristics

TYPE	Max pressure		Suggested max flow	Weight
DCB-03-*-*	P - A - B	T	50 l/min	1.3 Kg.
	350 bar	160 bar		

Description

Cetop-03 size, lever-operated, four-way, two or three- position, spool distributor.

Dimensions

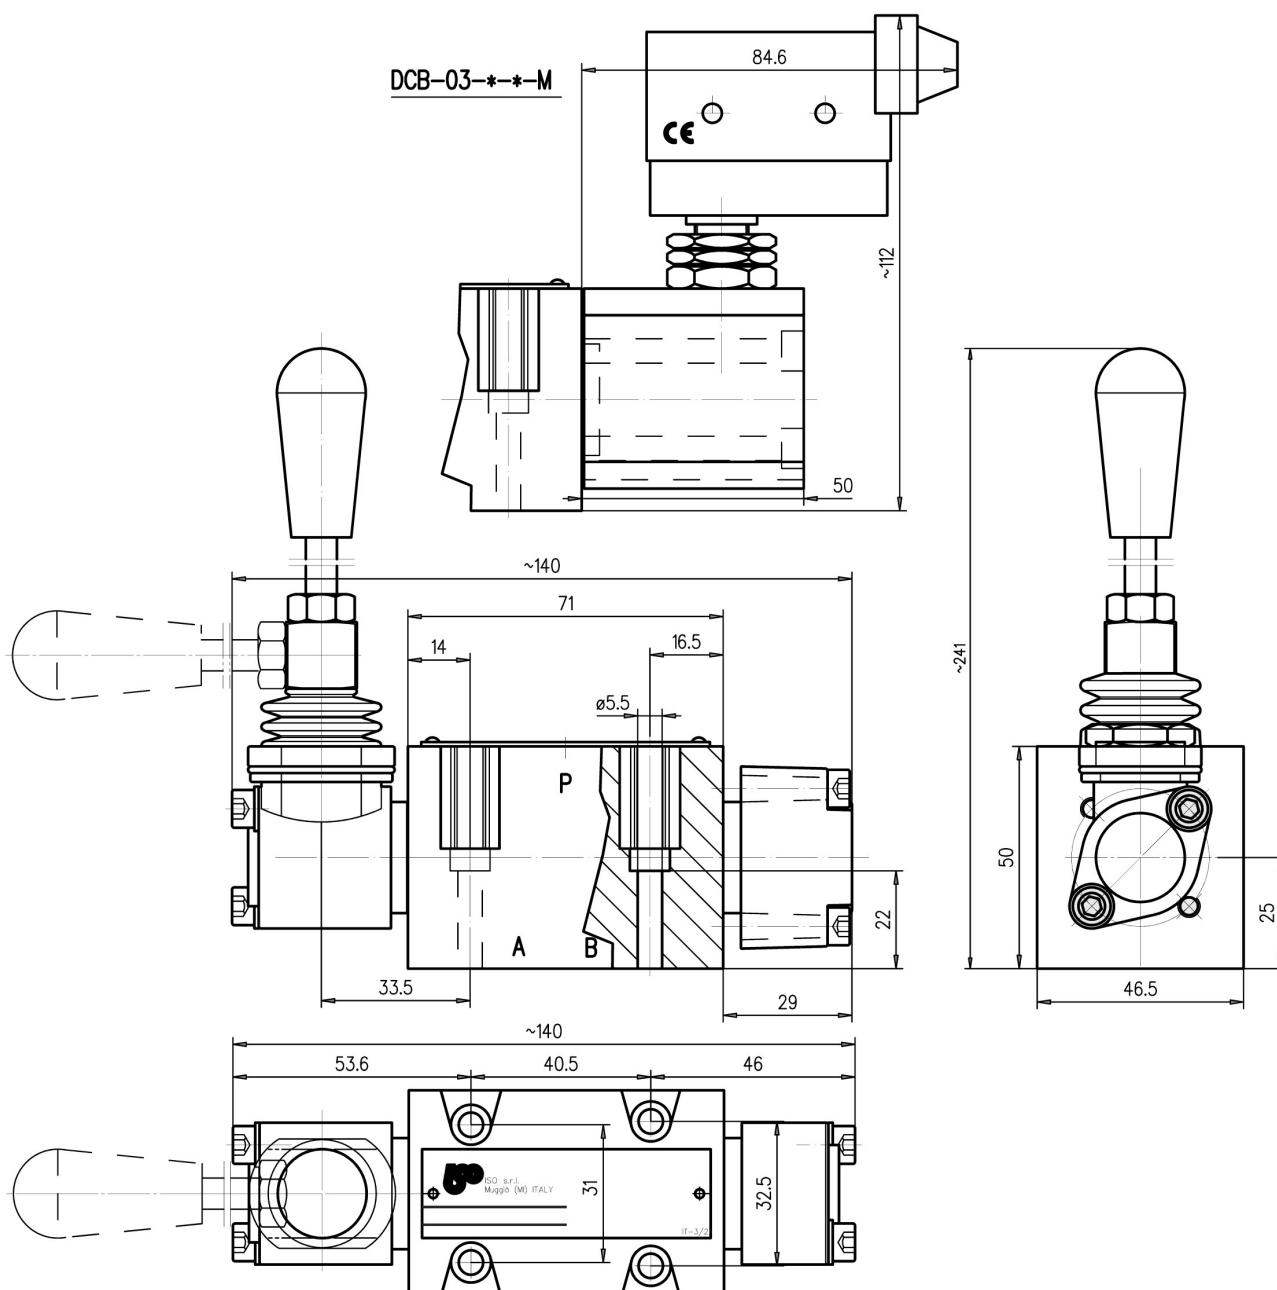



"A" TABLE

Type of control	
1	3 positions, spring return to the center position
2	2 positions-spring return to the internal position
2/A	2 positions-spring return to the internal position
4	3 positions – with detent in three position
5	2 positions – with detent in two positions
6	2 positions – with detent in two positions
6/A	2 positions – with detent in two positions
8	2 positions, spring return to the center position
8/A	2 positions, spring return to the center position

"B" TABLE

Type of spool	
0	
1	
3	
4	
5	
6	
7	



Installation rules

- The distributors type DCB-03 can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration: 25μ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

