



Hall Effect Speed/ Proximity Sensor

Non-contact Hall effect sensor designed for speed or proximity measurements on critical turbomachinery applications such as steam, gas and hydro turbines, compressors, pumps, and fans.

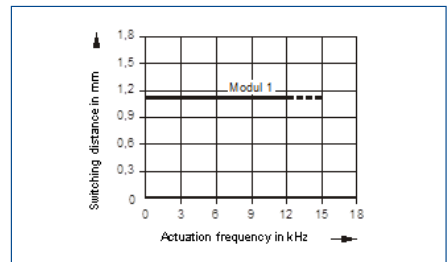

Dynamic Performance	
Output	1 AC cycle per revolution/gear tooth
Rise/Fall Time	1 μ s
Output Voltage (12 VDC at 100 Kload)	High >10 V / Low <1V
Air Gap	1 mm (Module 1) 1.5 mm (Module \geq 2)
Maximum Operating Frequency	12 kHz (720,000 cpm)
Trigger Mark Limited to	Spur Wheel, Involute Gearing Module 1
	Material ST37
Measuring Target	
Target/Surface Material	Magnetic soft iron or steel (non stainless steel)
Environmental	
Reference Temperature	25°C (77°F)
Operating Temperature Range	-25 to 100°C (-13 to 212°F)
Storage Temperature	-40 to 100°C (-40 to 212°F)
Sealing Rating	IP67
Power Supply	10 to 30 VDC @ max. 25mA
Resistance	Max. 400 Ohms
Material	Sensor – Stainless steel; Cable – PTFE
Weight (Sensor only)	210 grams (7.4 oz)

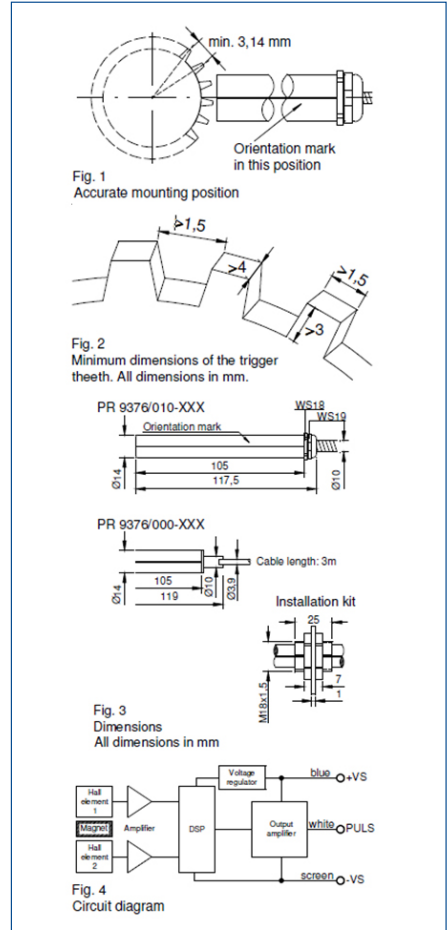

Compliance and Certifications

CE	2014/30/EU (EN 60947-5-2) 2014/35/EU 2011/65/EU (EN 63000)
----	--

Ordering Information Sensor

Model No.	/	0	Armored Cable X	0	-	0	Cable Length X	1
PR9376			0 Without 1 With				0 3m 1 5m 2 10m	

Example: PR9376/000-001
 PR9376 sensor with 3 meter non-armored cable, Open Cable End

Dimensions

PR9376/000-0x1

All dimensions in mm

PR9376/010-0x1

All dimensions in mm