

Solenoid operated valves 2-way 2-positions  
Common cavity size 08  
Cartridge style in manifold



VEI-CS-16-08A

OS.15 - K - 18 - X - Y - Z - W

**RE 18331-65**

Edition: 04.2023

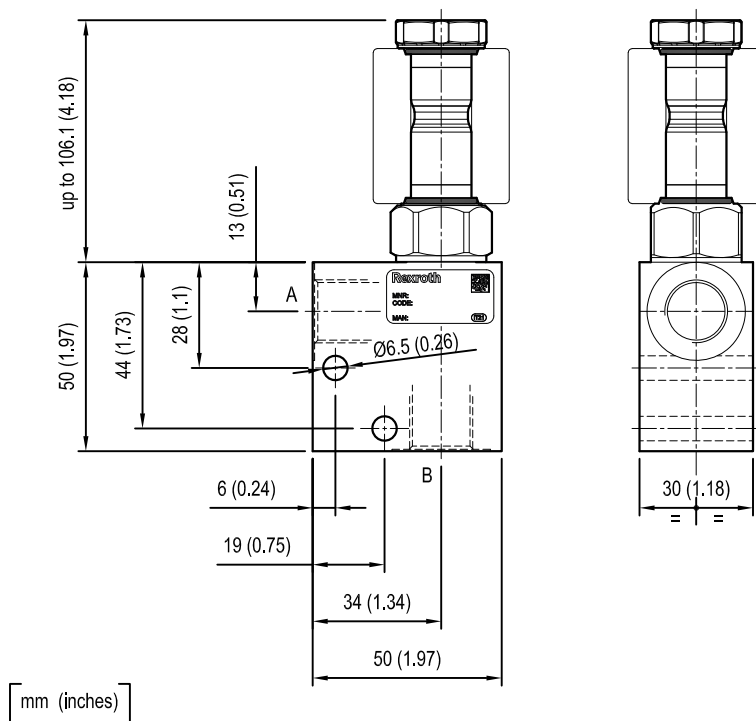Replaces: 02.2019




**Cartridge schemes (K)**

monodirectional type	bidirectional type
01	05
02	06
07	31
08	32

**Technical data**

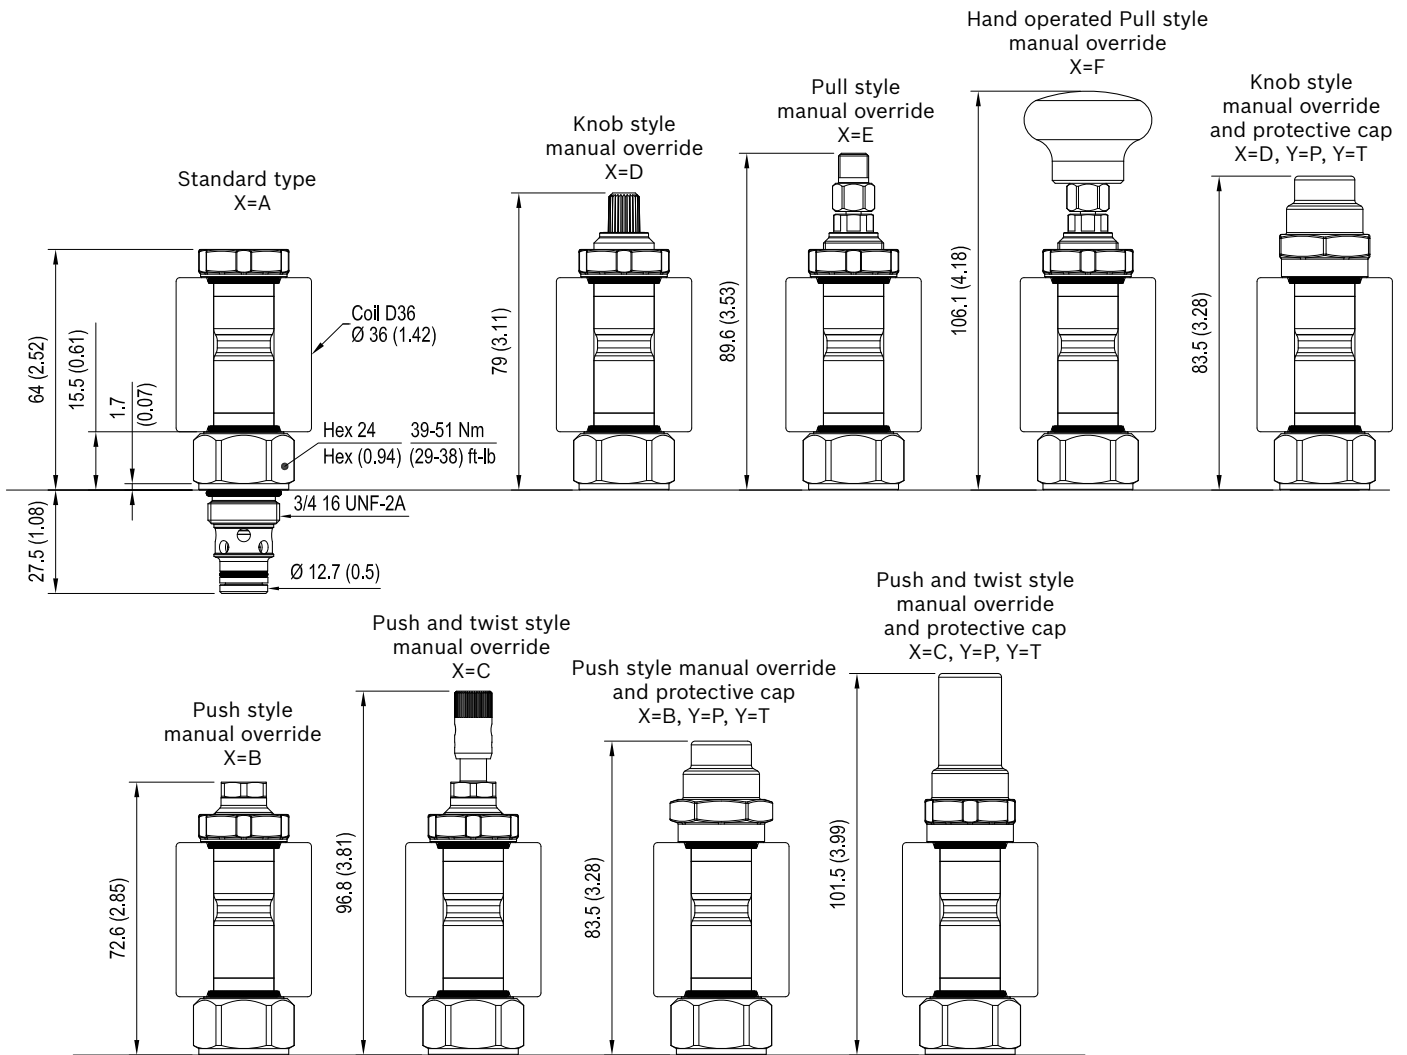Max. flow	40 l/min (11 gpm)
Max. operating pressure for steel body	350 bar (5000 psi)
Max operating pressure for aluminium body	210 bar (3000 psi)
Ambient temperature range	-30 to 90 °C (-22 to 194 °F)
Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 20 to 380 mm <sup>2</sup> /s (cSt)	
MTTFd	150 years see RE 18350-51
To order manifold only, see data sheet RE 18325-85	
Other technical data	See data sheet 18350-50



**Cartridge technical data**

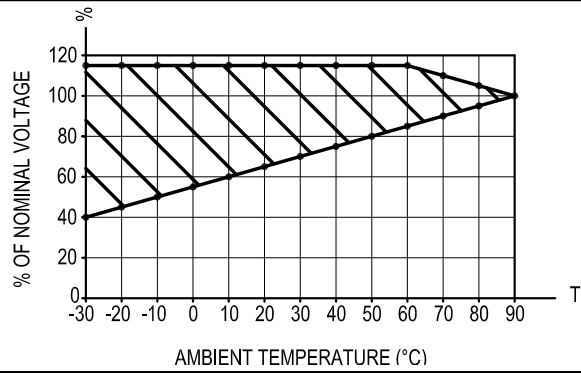
General	
Installation orientation	Unrestricted
Ambient temperature range	-30 to 90 °C (-22 to 194 °F)
Hydraulic	
Max. operating pressure	350 bar (5000 psi)
Flow range	0.5 - 40 l/min (0.1 - 11 gpm)
Max. internal leakage	5 drops/min.
Switching time	Opening ≤ 50 ms
	Closing ≤ 100 ms
Fluid temperature range	-20 to 80 °C (-4 to 176 °F)
Fluids: Mineral-based or synthetics with lubricating properties at viscosities of 20 to 380 mm <sup>2</sup> /s (cSt)	
Installation torque	39 - 51 Nm (29 - 38 ft-lbs)
Recommended degree of fluid contamination	Nominal value max. 10 µm (NAS 8) ISO 4406 19/17/14
MTTFd	150 years see RE 18350-51
Cavity	CA-08A-2N see data sheet 18325-70
Other technical data	See data sheet 18350-50

Electrical	
Type of voltage	DC voltage
Coil type	D36
Supply voltage	See data sheet 18325-90
Voltage tolerance against ambient temperature	See characteristic curve
Power consumption	20 W
Type of protection	See data sheet 18325-90
Note: Coils must be ordered separately	


TAB. 1		Manual override options (X)					
Seal and prot. cap. (Y)		A	B	C	D	E	F
	O	K=all versions	K=02; K=06 K=08; K=32	K=02; K=06 K=08; K=32	K=01; K=05 K=07; K=31	K=01; K=05 K=07; K=31	K=01; K=05 K=07; K=31
V	K=all versions	K=02; K=06 K=08; K=32	K=02; K=06 K=08; K=32	K=01; K=05 K=07; K=31	K=01; K=05 K=07; K=31	K=01; K=05 K=07; K=31	K=01; K=05 K=07; K=31
P	/	K=02; K=06 K=08; K=32	K=02; K=06 K=08; K=32	K=01; K=05 K=07; K=31	/	/	/
T	/	K=02; K=06 K=08; K=32	K=02; K=06 K=08; K=32	K=01; K=05 K=07; K=31	/	/	/

Characteristic curves

All Versions - Admissible supply voltage Vs. Ambient temperature at 100% duty cycle











All Versions

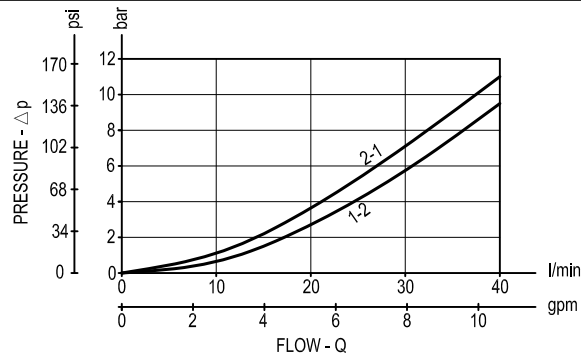

Ordering code

<b>OS.15</b>	<b>K</b>	<b>18</b>	<b>X</b>	<b>Y</b>	<b>Z</b>	<b>W</b>
--------------	----------	-----------	----------	----------	----------	----------

Solenoid operated valves  
2-way 2-positions  
Common cavity size 08  
Cartridge style in manifold

	<b>01</b>
	<b>02</b>
	<b>05</b>
	<b>06</b>
	<b>07</b>
	<b>08</b>
	<b>31</b>
	<b>32</b>

**Manifold material**

<b>00</b>	Aluminium
<b>S0</b>	Steel

**Manifold port sizes**

<b>09</b>	G 1/4
<b>02</b>	G 3/8
<b>11</b>	M 14x1.5

**Cartridge seals and accessories options**

- 0** = With buna seal
- V** = With Viton seal
- P** = With buna seal and protective cap for override version **B, C** and **D**
- T** = With Viton seal and protective cap for override version **B, C** and **D**

**Cartridge options**

- A** = Standard
- B** = Push style manual override
- C** = Push and twist style manual override
- D** = Knob style manual override
- E** = Pull style manual override
- F** = Hand operated pull style manual override

Common cavity size 08

**Note:** for solutions availability (K-X-Y combinations), please refer to TAB.1 on page 2.