

Insert type Relief, direct acting adjustable, anti-cavitation function


Special cavity, 730

VRA1.050

OT.M6.02 - X - 99 - Z



Dimensions

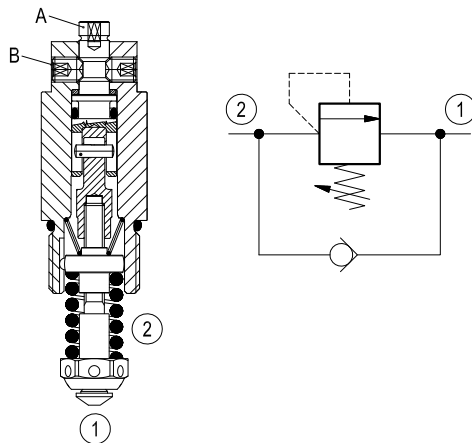

Description

Flow is free from 1 to 2 until pressure increases to meet the selected valve setting, allowing relief flow through port 1 to tank. This valve combine the typical function of shock relief valve (direct acting) and anticavitation function through the check valve. The direct action and the specific design allow a very fast opening and closing.



Note: to obtain a good leak proof performance coin the cavity seat using a loose valve seat (P/N 0F.S0.108) as a coining tool.

Please consult factory for any question.

Please be careful to the following instructions:

- 1) Screw the valve into the cavity using the mentioned installation torque;
- 2) Adjust the setting using the stem "A";
- 3) Once the valve is adjusted to the required pressure setting, lock the screw "B". Be careful to make the pressure setting adjustment when the screw "B" is loose; block the screw with torque 2-4 Nm (1.5-3 ft-lbs) only when the pressure setting is adjusted.

Performance

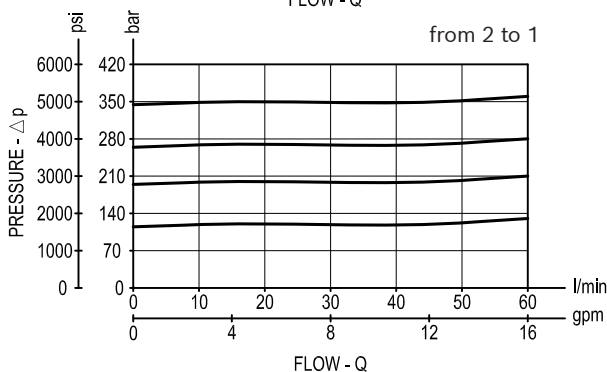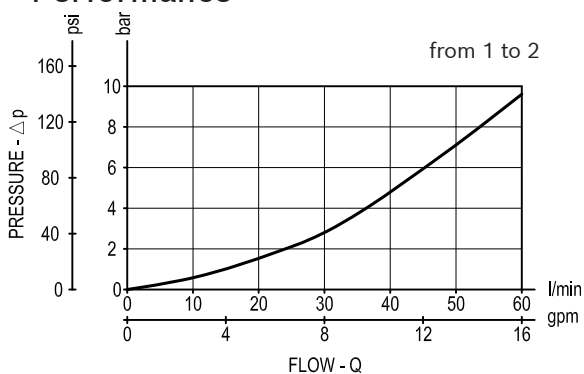

Technical data

Max. operating pressure	bar (psi)	380 (5500)
Max. flow	l/min. (gpm)	60 (16)
Max. internal leakage (*)	drops/min.	15
Fluid temperature range	°C (°F)	-30 to 100 (-22 to 212)
Installation torque	Nm (ft-lbs)	45-50 (33-37)
Weight	kg (lbs)	0.08 (0.18)
Special cavity		730 see data sheet RE 18325-75
Lines bodies and standard assemblies		Please refer to section "Hydraulic integrated circuit" or consult factory
MTTFD		150 years see data sheet 18350-51
Seal kit (**)	code material no.	RG0730020000100 R931002406
Fluids		Mineral-based or synthetics with lubricating properties at viscosities of 10 to 500 mm ² /s (cSt)
Recommended degree of fluid contamination		Nominal value max. 10µm (NAS 8) ISO 4406 20/18/15
Installation		No restrictions
Other Technical Data		See data sheet RE 18350-50

(*) at 80% of pressure setting

(**) Only external seals for 10 valves

