

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, QOU, 50A, 2 pole, 120/240VAC, 10kA

QOU250

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Miniature circuit-breaker
Range of Product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR rated

Complementary

Line Rated Current	50 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 120 V AC 48 V DC
Mounting Mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Height	4.05 in (102.87 mm)
Width	1.5 in (38.1 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14...AWG 2)

Environment

Product Certifications	UL Listed CSA IEC
------------------------	-------------------------

Ordering and shipping details

Category	US10DE200900
Discount Schedule	0DE2
GTIN	785901418771
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.60 in (9.144 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Width	4.80 in (12.192 cm)
Package 1 Length	2.20 in (5.588 cm)
Package weight(Lbs)	12.800 oz (362.874 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	24
Package 2 Height	3.60 in (9.144 cm)
Package 2 Width	13.60 in (34.544 cm)
Package 2 Length	20.90 in (53.086 cm)
Package 2 Weight	19.350 lb(US) (8.777 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	1008
Package 3 Height	40.00 in (101.6 cm)
Package 3 Width	40.00 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)
Package 3 Weight	790.0007 lb(US) (358.338 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **20**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **Yes**

[EU RoHS Directive](#) **Compliant**

SCIP Number **Af42fb01-813d-40c0-ae28-b8b3299dbc99**

Halogen content performance **Halogen free product**

Use Again

Repack and remanufacture


Circularity Profile **No need of specific recycling operations**

Take-back **No**


WEEE Label  **The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Technical Illustration

Dimensions

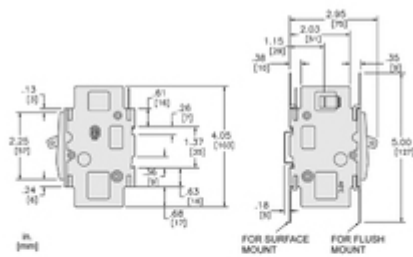

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG
 1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG
 TYP. BOTH ENDS FOR ALL CTS SHOWN PER ARTICLE 430-1-100 NEC

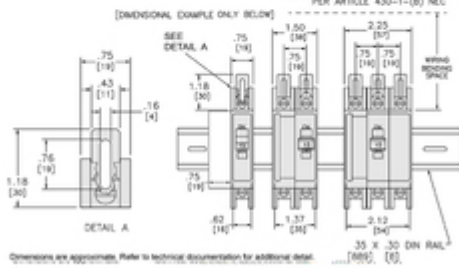

Dimensions are approximate. Refer to technical documentation for additional detail.